

Tracked Elevating Device (TED)

PART NO

TED-ASY-000-00

COMPLIES WITH

AS1170.0, AS1170.1, AS4100, AS4991, AS2359.1, AS2359.2

Designed by a fitter for fitters, TED is the only remote controlled, all terrain, hydraulic belly plate jack on the market. Effortless, remote controlled operation keeps fitters out of the danger zone during critical lift and lowering stages of suspended load component removal and install. In addition to protecting against fatal suspended load injuries, TED helps reduce workplace injuries such as chronic back problems and strain injuries.




SPECIFICATIONS	
Tare Weight (kg/lbs)	580 / 1,280
Safe Working Load (kg/lbs)	800 / 1,760
Ground Speed	Slow 0.7km/hr / 0.4MPH Fast 1.1km/hr / 1MPH
Drive Motors	Two HR-125 Hydraulic Motors 13.1 HP (continuous) SAE A Flange Mount, 1" Straight Woodruff key
Power Unit	Hydro-Tek Hydraulic Power Unit 12VDC, 2kW Motor 1.6cc Pump with 4L Tank
Battery System	12VDC 224AH Battery system Two 6VDC 224AH Deep-Cycle AGM batteries in series
Radio System	Magnatek MHR Radio Controller & Flexpro8 Transmitter (Paired system) 433-434Mhz operating frequency



DIMENSIONS (MM/INCH)

Length (L)	1,374 / 54.1	Table Length (TL)	1,073 / 42.25
Width (W)	778 / 30.6	Ground Clearance (GC)	65 / 2.55
Height Compressed (HC)	315 / 12.4	Track Clearance (TC)	550 / 21.65
Height Extended (HE)	1,172 / 46.15	Track Width (TW)	100 / 3.95

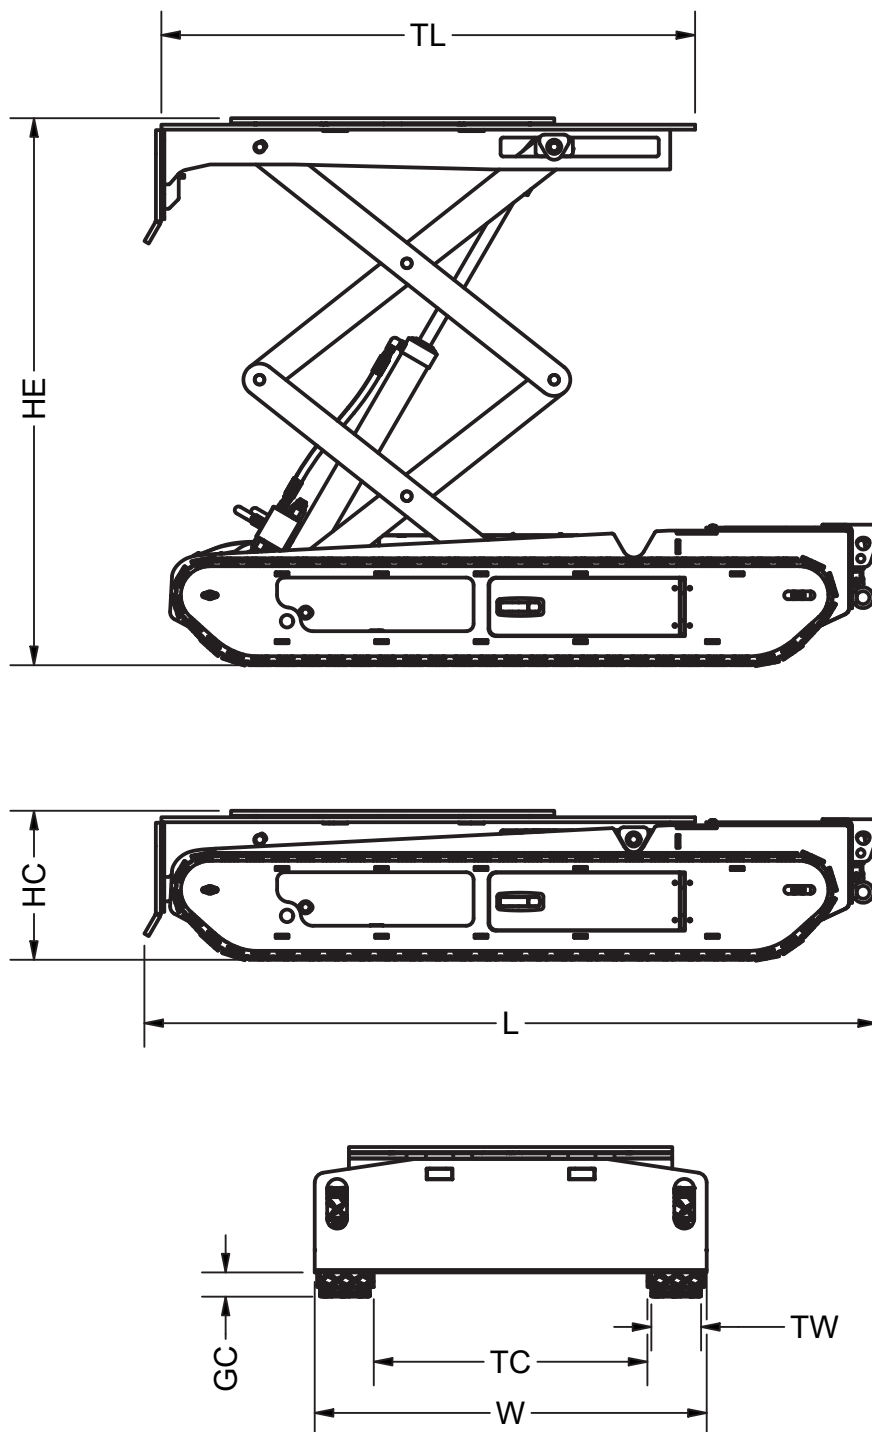

nivekindustries.com.au

sales@nivekindustries.com.au

+61 (0)400 675 531



NIVEK
INDUSTRIES
PTY LTD